

Inline filter with filter element according to DIN 24550

Type 50LEN0040 to 0400; 50LE0130, 0150

RE 51447

Issue: 2014-11

Replaces: 05.14



- ▶ Size according to **DIN 24550**: 0040 to 0400
- ▶ additional sizes: 0130, 0150
- ▶ Nominal pressure 50 bar [725 psi]
- ▶ Connection up to 1 1/2"
- ▶ Operating temperature -10 °C to 100 °C [14 °F to 212 °F]

Features

Inline filters are used in hydraulic systems for separating solid materials from the fluids and lubricating oils. They are intended for attachment in pipelines.

They distinguish themselves by the following:

- ▶ Filters for inline installation
- ▶ Special highly efficient filter materials
- ▶ Filtration of very fine particles and high dirt holding capacity across a broad pressure differential range
- ▶ High collapse resistance of the filter elements
- ▶ By default equipped with mechanical optical maintenance indicator with memory function
- ▶ Available as an option with different electronic switching elements, modular design
- ▶ Optional bypass valve integrated in the filter housing

Contents

| | |
|--------------------------------------|-----------|
| Features | 1 |
| Ordering code filter | 2, 3 |
| Preferred types | 4 |
| Ordering code accessories | 5 |
| Symbols | 6 |
| Function, section | 7 |
| Technical data | 8, 9 |
| Compatibility with hydraulic fluids | 9 |
| Characteristic curves | 10 ... 12 |
| Dimensions | 13 |
| Maintenance indicator | 14 |
| Ordering code spare parts | 15 ... 17 |
| Assembly, commissioning, maintenance | 18 |
| Tightening torques | 19 |
| Directives and standardization | 19, 20 |

Ordering code filter

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|
| 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 09 |
| 50LE | | | - | | - | - | - | - | - |

Series

| | | |
|----|--------------------------------|------|
| 01 | Inline filter 50 bar [725 psi] | 50LE |
|----|--------------------------------|------|

Filter element

| | | |
|----|---|---|
| 02 | with filter element according to DIN 24550 | N |
|----|---|---|

Size

| | | |
|----|---|--|
| 03 | LEN... (Filter element according to DIN 24550) | 0040 0063 0100 0160 0250 0400 |
| | LE... (Filter element according to Bosch Rexroth standard) | 0130 0150 |

Filter rating in µm

| | | |
|----|--|----------------------------------|
| 04 | Nominal Stainless steel wire mesh, cleanable | G10 G25 G40 G60 G100 |
| | Nominal Filter paper, not cleanable | P10 P25 |
| | Absolute (ISO 16889; $\beta_{x(c)} \geq 200$) Non-woven glass fiber media, not cleanable | H3XL H6XL H10XL H20XL |

Pressure differential

| | | |
|----|--|-----|
| 05 | max. admissible pressure differential of the filter element 30 bar [435 psi], with bypass valve | A00 |
| | max. admissible pressure differential of the filter element 330 bar [4786 psi], without bypass valve | B00 |

Maintenance indicator

| | | |
|----|---|------|
| 06 | Maintenance indicator, mech./optical, switching pressure 0.8 bar [11.6 psi] – bypass cracking pressure 2.5 bar [36 psi] | V0.8 |
| | Maintenance indicator, mech./optical, switching pressure 1.5 bar [21.8 psi] – bypass cracking pressure 2.5 bar [36 psi] | V1.5 |
| | Maintenance indicator, mech./optical, switching pressure 2.2 bar [32 psi] – bypass cracking pressure 3.5 bar [51 psi] | V2.2 |
| | Maintenance indicator, mech./optical, switching pressure 5.0 bar [72.5 psi] – bypass cracking pressure 7 bar [102 psi] | V5,0 |

Seal

| | | |
|----|----------|---|
| 07 | NBR seal | M |
| | FKM seal | V |

Connection

| | | | | | | |
|--------|--|------------------|------------------|------------------|------------------------------------|----|
| 08 | Frame size | 0040-0100 | 0130-0150 | 0160-0400 | | |
| | Connection | | | | | |
| | G 3/4 | ● | | | Pipe thread according to ISO 228 | R3 |
| | G 1 | | ● | | | R4 |
| | G 1 1/2 | | | ● | | R6 |
| | SAE 12 | X | | | Pipe thread according to SAE J1926 | U4 |
| | SAE 16 | | X | | | U9 |
| SAE 24 | | | X | U6 | | |
| | <input checked="" type="checkbox"/> Standard connection <input type="checkbox"/> Alternative connection | | | | | |

Supplementary information

Ordering code filter

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|
| 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 09 |
| 50LE | | | - | | - | - | - | - | - |

| | | |
|----|--|-----------|
| 09 | without bypass valve (only possible in connection with filter element version "A00") ¹⁾ | NB |
| | Manufacturer's inspection certificate M according to DIN 55350 T18 | Z1 |

¹⁾ **Attention:** If this option is selected and the maintenance indicator is not observed, the filter element may collapse in case of operating pressures of more than 30 bar [435 psi].

Order example:

50LEN0100-H3XLA00-V5,0-M-R4

Further versions (filter materials, connections,...) are available on request.

Preferred types**NBR seal, with bypass, flow specifications for 30 mm²/s [143 SUS]**Inline filter 50 LE(N), filter rating **3 µm**

| Type | Flow in l/min [gpm] at Δp = 1 bar [14.5 psi] | Material no. Filter | | | | Material no. Replacement filter element |
|-----------------------------|---|---------------------|------------|------|------------|---|
| | | ..R3 | R928048449 | ..U4 | R928048452 | |
| 50LEN0040-H3XLA00-V2,2-M-.. | 23 [6.08] | ..R3 | R928048449 | ..U4 | R928048452 | R928006645 |
| 50LEN0063-H3XLA00-V2,2-M-.. | 30 [7.93] | ..R3 | R928050995 | ..U4 | R928048453 | R928006699 |
| 50LEN0100-H3XLA00-V2,2-M-.. | 44 [11.62] | ..R3 | R928051075 | ..U4 | R928048454 | R928006753 |
| 50LE0130-H3XLA00-V2,2-M-.. | 74 [19.55] | ..R4 | R928050770 | ..U9 | R928048455 | R928022274 |
| 50LE0150-H3XLA00-V2,2-M-.. | 89 [23.51] | ..R4 | R928050850 | ..U9 | R928048456 | R928022283 |
| 50LEN0160-H3XLA00-V2,2-M-.. | 132 [34.87] | ..R6 | R928051152 | ..U6 | R928048457 | R928006807 |
| 50LEN0250-H3XLA00-V2,2-M-.. | 190 [50.19] | ..R6 | R928051232 | ..U6 | R928048458 | R928006861 |
| 50LEN0400-H3XLA00-V2,2-M-.. | 250 [66.04] | ..R6 | R928051312 | ..U6 | R928048459 | R928006915 |

Inline filter 50 LE(N), filter rating **6 µm**

| Type | Flow in l/min [gpm] at Δp = 1 bar [14.5 psi] | Material no. Filter | | | | Material no. Replacement filter element |
|-----------------------------|---|---------------------|------------|------|------------|---|
| | | ..R3 | R928050930 | ..U4 | R928050931 | |
| 50LEN0040-H6XLA00-V5,0-M-.. | 31 [8.19] | ..R3 | R928050930 | ..U4 | R928050931 | R928006646 |
| 50LEN0063-H6XLA00-V5,0-M-.. | 46 [12.15] | ..R3 | R928051008 | ..U4 | R928051009 | R928006700 |
| 50LEN0100-H6XLA00-V5,0-M-.. | 57 [15.06] | ..R3 | R928051088 | ..U4 | R928051089 | R928006754 |
| 50LE0130-H6XLA00-V5,0-M-.. | 94 [24.83] | ..R4 | R928050783 | ..U9 | R928050784 | R928022275 |
| 50LE0150-H6XLA00-V5,0-M-.. | 103 [27.21] | ..R4 | R928050863 | ..U9 | R928050864 | R928022284 |
| 50LEN0160-H6XLA00-V5,0-M-.. | 175 [46.23] | ..R6 | R928051165 | ..U6 | R928051166 | R928006808 |
| 50LEN0250-H6XLA00-V5,0-M-.. | 226 [59.70] | ..R6 | R928051245 | ..U6 | R928051246 | R928006862 |
| 50LEN0400-H6XLA00-V5,0-M-.. | 282 [74.50] | ..R6 | R928051325 | ..U6 | R928051326 | R928006916 |

Inline filter 50 LE(N), filter rating **10 µm**

| Type | Flow in l/min [gpm] at Δp = 1 bar [14.5 psi] | Material no. Filter | | | | Material no. Replacement filter element |
|------------------------------|---|---------------------|------------|------|------------|---|
| | | ..R3 | R928047959 | ..U4 | R928048460 | |
| 50LEN0040-H10XLA00-V2,2-M-.. | 36 [9.51] | ..R3 | R928047959 | ..U4 | R928048460 | R928006647 |
| 50LEN0063-H10XLA00-V2,2-M-.. | 69 [18.23] | ..R3 | R928050967 | ..U4 | R928048461 | R928006701 |
| 50LEN0100-H10XLA00-V2,2-M-.. | 75 [19.81] | ..R3 | R928051047 | ..U4 | R928048462 | R928006755 |
| 50LE0130-H10XLA00-V2,2-M-.. | 127 [33.55] | ..R4 | R928050743 | ..U9 | R928048463 | R928022276 |
| 50LE0150-H10XLA00-V2,2-M-.. | 150 [39.63] | ..R4 | R928050822 | ..U9 | R928048464 | R928022285 |
| 50LEN0160-H10XLA00-V2,2-M-.. | 210 [55.48] | ..R6 | R928051125 | ..U6 | R928048465 | R928006809 |
| 50LEN0250-H10XLA00-V2,2-M-.. | 260 [68.68] | ..R6 | R928051204 | ..U6 | R928048466 | R928006863 |
| 50LEN0400-H10XLA00-V2,2-M-.. | 300 [79.25] | ..R6 | R928051284 | ..U6 | R928048467 | R928006917 |

Ordering code accessories

(dimensions in mm [inch])

Electronic switching element for maintenance indicators

| | | |
|----|----|----|
| 01 | 02 | 03 |
| WE | - | - |

Maintenance indicator

| | | |
|----|------------------------------|-----------|
| 01 | electronic switching element | WE |
|----|------------------------------|-----------|

Type of signal

| | | |
|----|--|--------------|
| 02 | 1 switching point | 1SP |
| | 2 switching points, 3 LED | 2SP |
| | 2 switching points, 3 LED and signal suppression up to 30 °C [86 °F] | 2SPSU |

Connector

| | | |
|----|---|---------------------|
| 03 | Round plug-in connection M12 x 1, 4-pole | M12 x 1 |
| | Rectangular plug-in connection, 2-pole, design A according to EN-175301-803 | EN175301-803 |

Material numbers of the electronic switching elements


| Material no. | Type | Signal | Switching points | Connector | LED |
|-------------------|---------------------|--|------------------|---------------|----------|
| R928028409 | WE-1SP-M12 x 1 | Changeover | 1 | M12 x 1 | No |
| R928028410 | WE-2SP-M12 x 1 | Normally open (at 75%) / normally closed contact (at 100%) | 2 | | 3 pieces |
| R928028411 | WE-2SPSU-M12 x 1 | | | | |
| R928036318 | WE-1SP-EN175301-803 | Normally closed contact | 1 | EN 175301-803 | No |

Mating connectors according to IEC 60947-5-2

for electronic switching element with round plug-in connection M12 x 1

Mating connector suitable for K24 4-pole, M12 x 1 with screw connection, cable gland Pg9.

Material no. R900031155

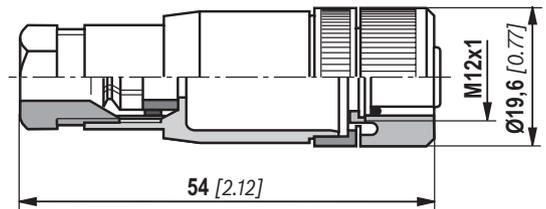


Mating connector suitable for K24-3m 4-pole, M12 x 1 with potted-in PVC cable, 3 m long.

Line cross-section: 4 x 0.34 mm²

Core marking: **1** brown **2** white
 3 blue **4** black

Material no. R900064381

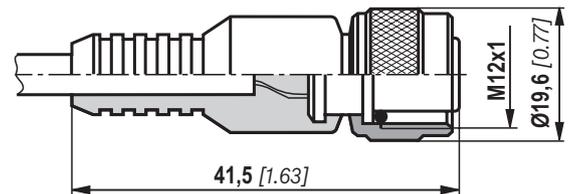

For more round plug-in connections and technical data refer to data sheet 08006.

Order example:

Inline filter with mechanical optical maintenance indicator for $p_{nom.} = 50 \text{ bar}$ [725 psi] with bypass valve, size 0160, with filter element 10 µm and electronic switching element M12 x 1 with 1 switching point for hydraulic fluid mineral oil HLP according to DIN 51524.

Filter with mech. optical maintenance indicator: 50LEN0160-H10XLA00-V5,0-M-R6

Material no. R928051126



Switching element: WE-1SP-M12 x 1

Material no. R928028409

Mating connector: Mating connector suitable for K24 4-pole, M12 x 1 Material no. R900031155 with screw connection, cable gland Pg9.

Symbols


Inline filter with bypass and mechanical indicator



Inline filter without bypass and with mechanical indicator


Electronic switching element for maintenance indicator

Switching element Connector

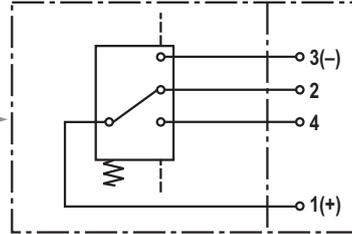


WE-1SP-M12 x 1

Switching element Connector

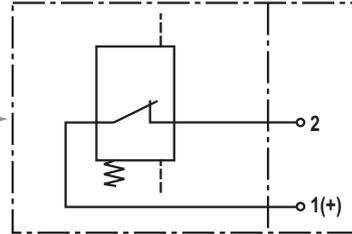

WE-1SP-EN175301-803


Switching element Connector

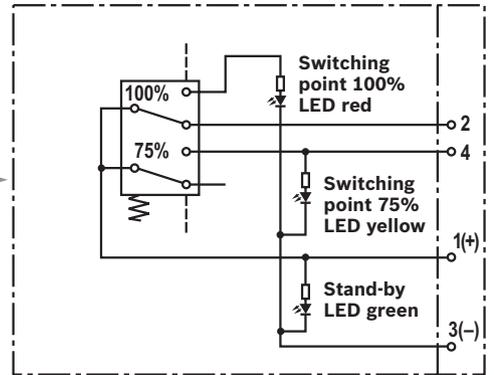

WE-2SP-M12 x 1

Circuit diagram drawn in plugged condition (operating state)

Switching element Connector

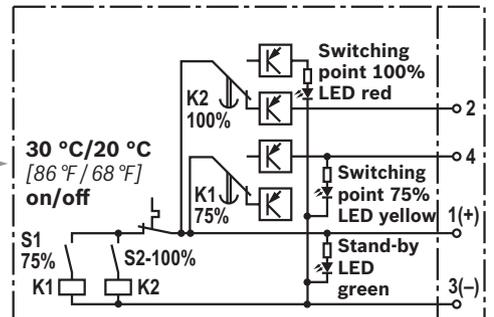

WE-2SPSU-M12 x 1

Circuit diagram drawn in plugged condition at temperature > 30 °C [86 °F] (operating state)

Function, section

The 50LE(N) inline filter is suitable for direct installation into pressure lines. It is installed upstream components to be protected.

It basically consists of filter head (1), a screwable filter bowl (2), filter element (3) as well as mechanical optical maintenance indicator (4). In case of filters with low-pressure-differential-stable filter elements (= code letter pressure differential A), there is an assembled bypass valve (5) as standard.


The installed spring (6) prevents possible vibrations of the filter element (3). During disassembly, the contact pressure of the spring (6) holds the filter element in the filter bowl (2).

Via the inlet, the fluid reaches the filter element (3) where it is cleaned. The dirt particles filtered out settle in the filter element (3). Via the outlet, the filtered fluid enters the hydraulic circuit.

The filter housing and all connection elements are designed so that pressure peaks - as they may e.g. occur in case of abrupt opening of large control valves due to the accelerated fluid quantity - can be securely absorbed. As of size 0160, the standard equipment comprises a drain screw (7).

By default, the filter is equipped with mechanical optical maintenance indicator (4). The electronic switching element (8) which has to be ordered separately is attached to the mechanical optical maintenance indicator (4) and held by means of a locking ring.

The electronic switching elements with 1 or 2 switching points are connected via a mating connector according to IEC-60947-5-2 or via a cable connection according to EN17301-803.

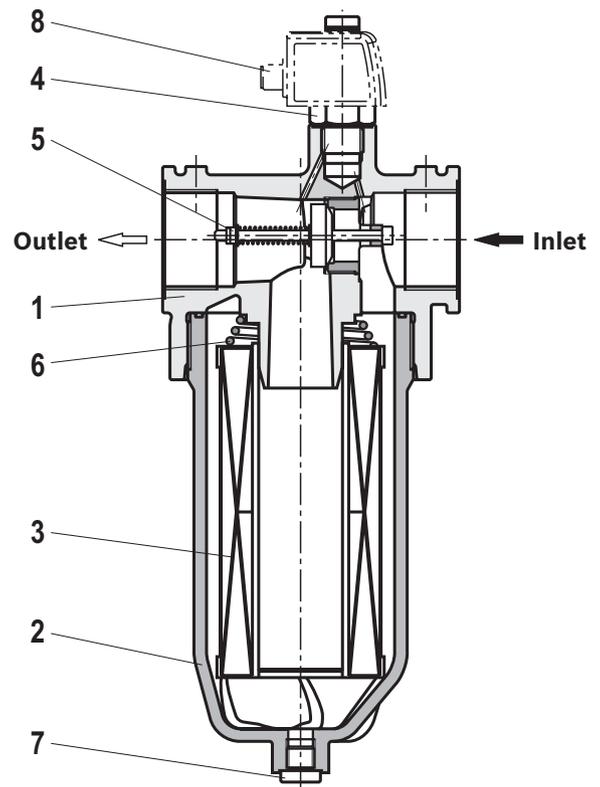

Type 50LEN0160

WARNING!

If the maintenance indicator is not observed while the element is exchanged, the bypass valve will open if the pressure differential increases. This means that part of the volume flow enters unfiltered into the clean side of the filter. Effective filtration is therefore no longer guaranteed.

Technical data

(For applications outside these parameters, please consult us!)

| General | | | | | |
|------------------------------|---------------------------------|--|-------------|-------------|-------------|
| Installation position | | vertical | | | |
| Ambient temperature range | | °C [°F] -10 ... +100 [14 ... +212] (shortly up to -30 [-22]) | | | |
| Weight | NS | 0040 | 0063 | 0100 | 0130 |
| | kg [lbs] | 1.05 [2.3] | 1.1 [2.4] | 1.2 [2.6] | 1.91 [4.2] |
| | NS | 0150 | 0160 | 0250 | 0400 |
| | kg [lbs] | 2.06 [4.5] | 3.1 [6.8] | 3.3 [7.3] | 3.8 [8.4] |
| Volume | NS | 0040 | 0063 | 0100 | 0130 |
| | l [US gal] | 0.27 [0.07] | 0.39 [0.1] | 0.58 [0.15] | 0.89 [0.23] |
| | NS | 0150 | 0160 | 0250 | 0400 |
| | l [US gal] | 1.1 [0.29] | 1.31 [0.35] | 1.89 [0.50] | 2.84 [0.75] |
| Material | - Filter head | Aluminum | | | |
| | - Filter bowl | Aluminum | | | |
| | - Bypass valve | Aluminum / steel / POM | | | |
| | - Seals | NBR or FKM | | | |
| | - optical maintenance indicator | V0,8; V1,5; V2,2 | Aluminum | | |
| | | V5,0 | Brass | | |
| Electronic switching element | | Plastic PA6 | | | |

| Hydraulic | | | |
|--|-------------|--|---------------------------------------|
| Maximum operating pressure | bar [psi] | 50 [725] | |
| Hydraulic fluid temperature range | °C [°F] | -10 to +100 [+14 to +212] | |
| Minimum conductivity of the medium | pS/m | 300 | |
| Fatigue strength according to ISO 10771 | Load cycles | > 10 ⁶ with max. operating pressure | |
| Type of pressure measurement of the maintenance indicator | | Pressure differential | |
| Assignment: Response pressure of the maintenance indicator / cracking pressure of the bypass valve | bar [psi] | Response pressure of the maintenance indicator | Cracking pressure of the bypass valve |
| | | 0.8 ± 0.15 [11.6 ± 2.2] | 2.5 ± 0.25 [36.3 ± 3.6] |
| | | 1.5 ± 0.20 [21.8 ± 2.9] | 2.5 ± 0.25 [36.3 ± 3.6] |
| | | 2.2 ± 0.30 [31.9 ± 4.4] | 3.5 ± 0.35 [50.8 ± 5.1] |
| | | 5.0 ± 0.50 [72.5 ± 7.3] | 7.0 ± 0.5 [101.5 ± 7.3] |
| Filtration direction | | From the outside to the inside | |

| Electric (electronic switching element) | | | | | |
|---|--|--|---|---|-----------------------------------|
| Electrical connection | Version | Round plug-in connection M12 x 1, 4-pole | | | Standard connection EN 175301-803 |
| | | WE-1SP-M12 x 1 | WE-2SP-M12 x 1 | WE-2SPSU-M12 x 1 | WE-1SP-EN175301-803 |
| Contact load, direct voltage | A _{max.} | 1 | | | |
| Voltage range | V _{max.} | 150 (AC/DC) | 10-30 (DC) | | 250 (AC)/200 (DC) |
| max. switching power with resistive load | W | 20 | | | 70 |
| Switching type | - 75% signal | - | Normally open contact | | - |
| | - 100% signal | Changeover | Normally closed contact | | Normally closed contact |
| | - 2SPSU | | | Signal inter-connection at 30 °C [86 °F], return switching at 20 °C [68 °F] | |
| Display via LEDs in the electronic switching element 2SP... | | | Stand-by (LED green); 75% switching point (LED yellow) 100% switching point (LED red) | | |
| Protection class according to EN 60529 | | IP 67 | | | IP 65 |
| Ambient temperature range | | °C [°F] -25 to +85 [-13 to +185] | | | |
| For direct voltage above 24 V, spark extinguishing is to be provided for protecting the switching contacts. | | | | | |
| Weight | electronic switching element: - with round plug-in connection M12 x 1 | kg [lbs] | 0.1 [0.22] | | |

Technical data

(For applications outside these parameters, please consult us!)

| Filter element | | | |
|--|-------|---|--|
| Non-woven glass fiber media H..XL | | Single-use element on the basis of inorganic fiber | |
| | | Filtration ratio according to ISO 16889 up to $\Delta p = 5 \text{ bar}$ [72.5 psi] | Achievable oil cleanliness according to ISO 4406 [SAE-AS 4059] |
| | H20XL | $\beta_{20}(c) \geq 200$ | 19/16/12 – 22/17/14 |
| | H10XL | $\beta_{10}(c) \geq 200$ | 17/14/10 – 21/16/13 |
| | H6XL | $\beta_6(c) \geq 200$ | 15/12/10 – 19/14/11 |
| | H3XL | $\beta_3(c) \geq 200$ | 13/10/8 – 17/13/10 |
| Admissible pressure differential | – A | bar [psi] | 30 [435] |
| | – B | bar [psi] | 330 [4785] |

Compatibility with hydraulic fluids

| Hydraulic fluid | Classification | Suitable sealing materials | Standards |
|-----------------|----------------------|----------------------------|------------|
| Mineral oil | HLP | NBR | DIN 51524 |
| Biodegradable | – insoluble in water | HETG | VDMA 24568 |
| | | HEES | |
| | – soluble in water | HEPG | VDMA 24568 |
| Flame-resistant | – water-free | HFDU, HFDR | VDMA 24317 |
| | – containing water | HFAS | DIN 24320 |
| | | HFAE | |
| | | HFC | |
| | | NBR | VDMA 24317 |



Important information on hydraulic fluids!

- For more information and data on the use of other hydraulic fluids, please refer to data sheet 90220 or contact us!
- **Flame-resistant – containing water:** due to possible chemical reactions with materials or surface coatings of machine and system components, the service life with these hydraulic fluids may be less than expected. Filter materials made of filter paper P

(cellulose) may not be used, filter elements with filter materials made of glass fiber (HydroClean H...XL or wire mesh G) have to be used instead.

- **Biodegradable:** If filter materials made of filter paper are used, the filter life may be shorter than expected due to material incompatibility and swelling.







Characteristic curves H3XL

(measured with mineral oil HLP46 according to DIN 51524 at T = 40 °C) [104 °F]

Spec. weight: < 0.9 kg/dm³ Δp -Q-characteristic curves for complete filters recommended initial Δp for design = 1 bar [14.5 psi]

Selection of the perfect filter is made possible by our online "Bosch Rexroth FilterSelect" design software.

Oil viscosity:
 ——— 140 mm²/s [649 SUS]
 - · - · 68 mm²/s [315 SUS]
 - - - 30 mm²/s [143 SUS]

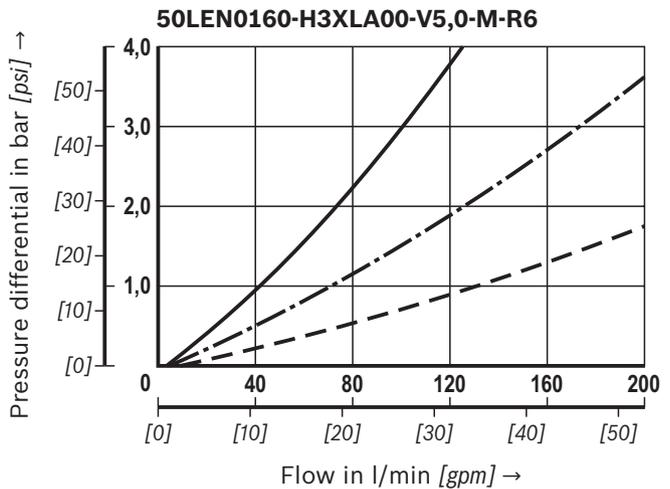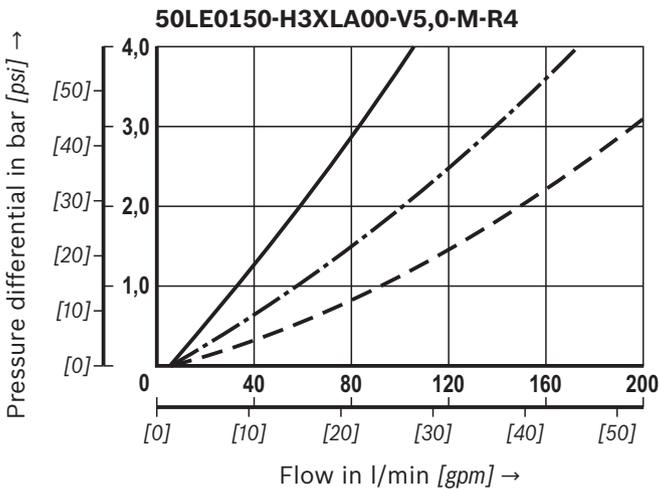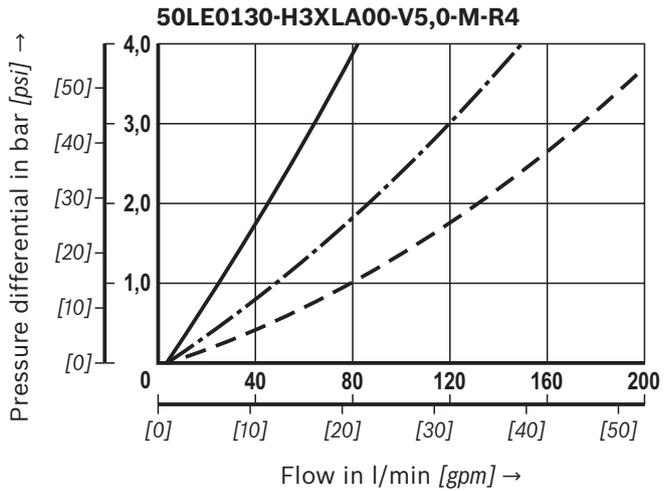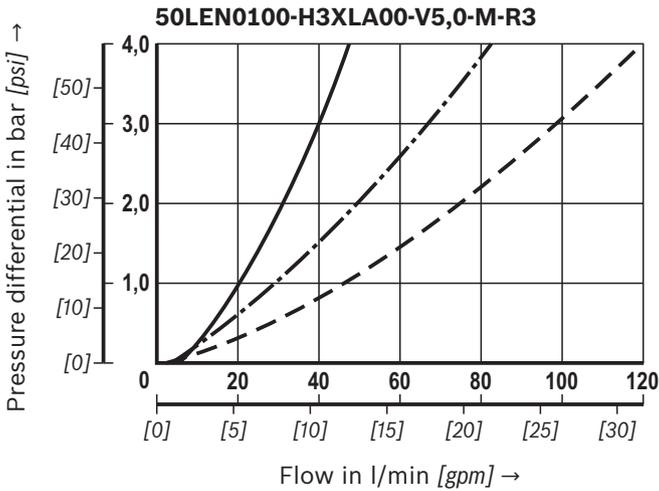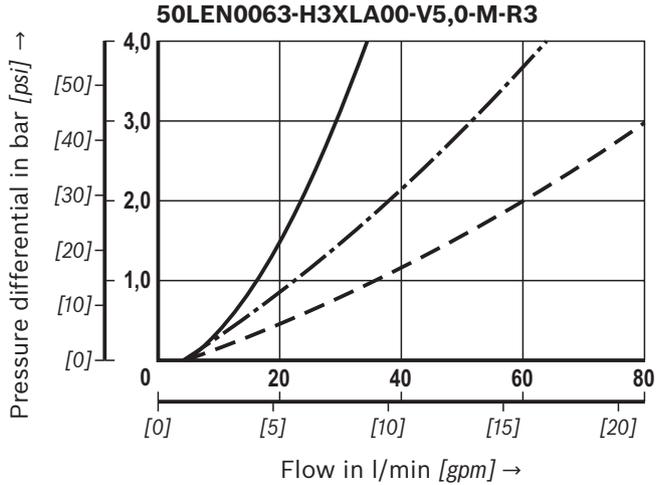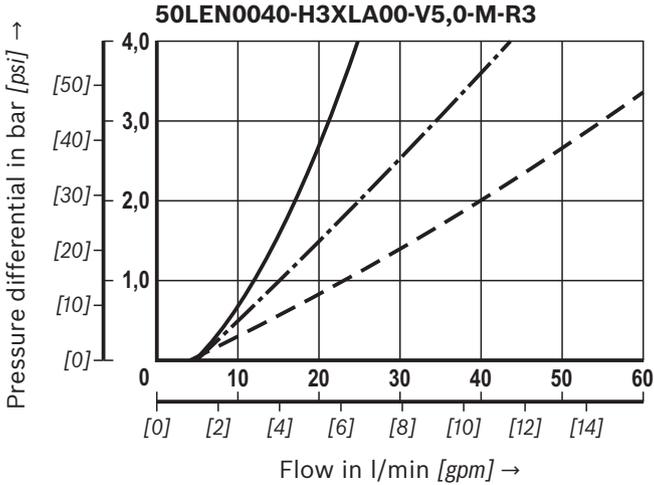

Characteristic curves H3XL; H10XL



(measured with mineral oil HLP46 according to DIN 51524 at T = 40 °C) [104 °F]

Spec. weight: < 0.9 kg/dm³ Δp -Q-characteristic curves for complete filters recommended initial Δp for design = 1 bar [14.5 psi]



Selection of the perfect filter is made possible by our online "Bosch Rexroth FilterSelect" design software.

Oil viscosity:
 ——— 140 mm²/s [649 SUS]
 - · - · 68 mm²/s [315 SUS]
 - - - 30 mm²/s [143 SUS]

H3XL

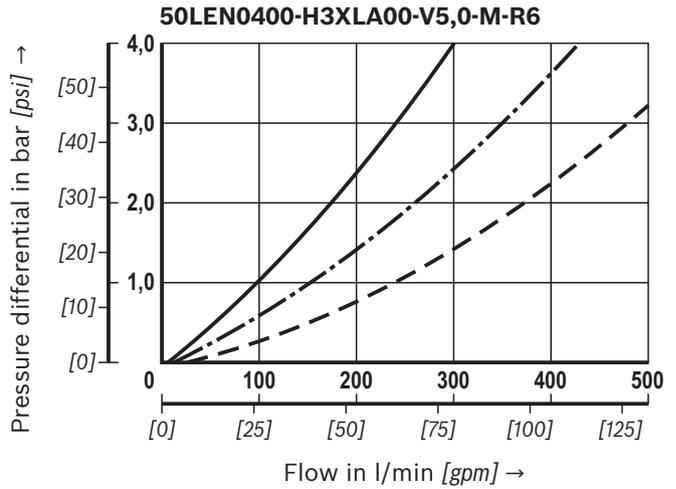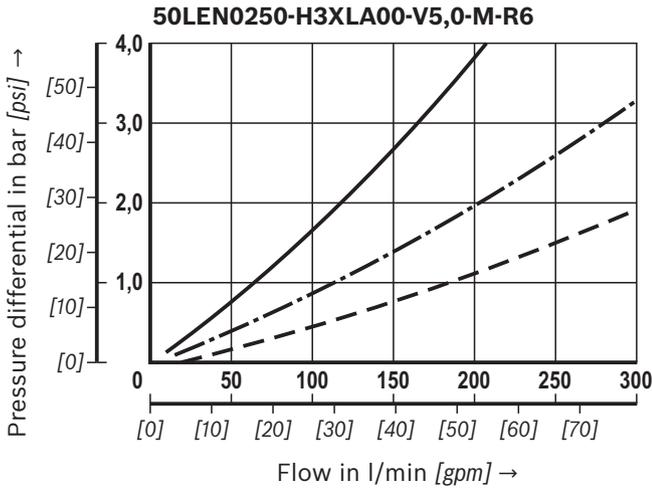

H10XL

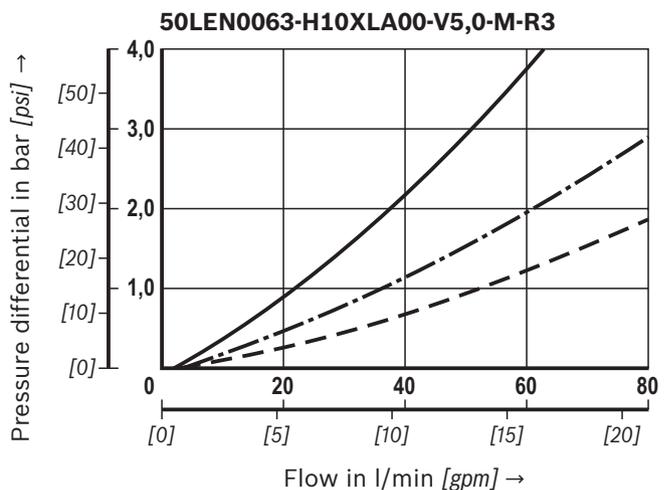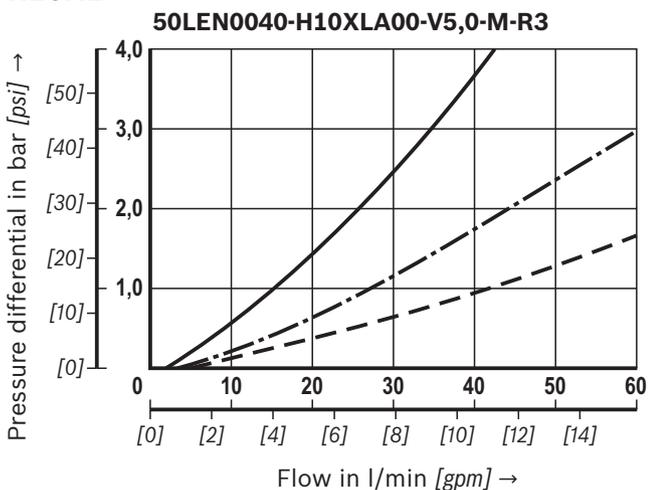







Characteristic curves H10XL

(measured with mineral oil HLP46 according to DIN 51524 at T = 40 °C) [104 °F]

Spec. weight: < 0.9 kg/dm³ Δp -Q-characteristic curves for complete filters recommended initial Δp for design = 1 bar [14.5 psi]

Selection of the perfect filter is made possible by our online "Bosch Rexroth FilterSelect" design software.

Oil viscosity:
 ——— 140 mm²/s [649 SUS]
 - · - · 68 mm²/s [315 SUS]
 - - - 30 mm²/s [143 SUS]

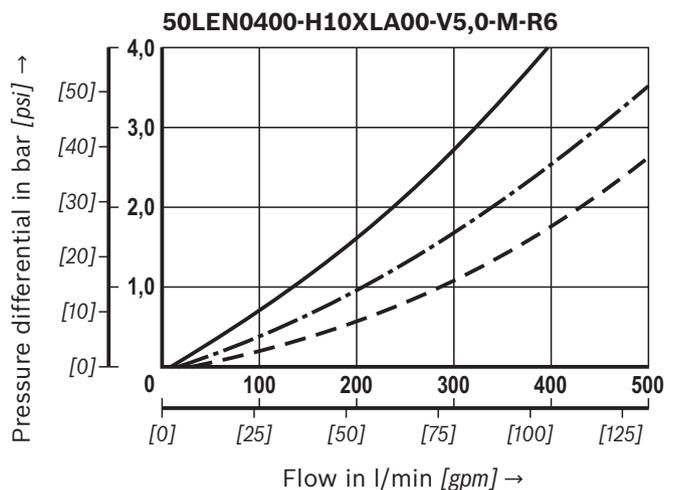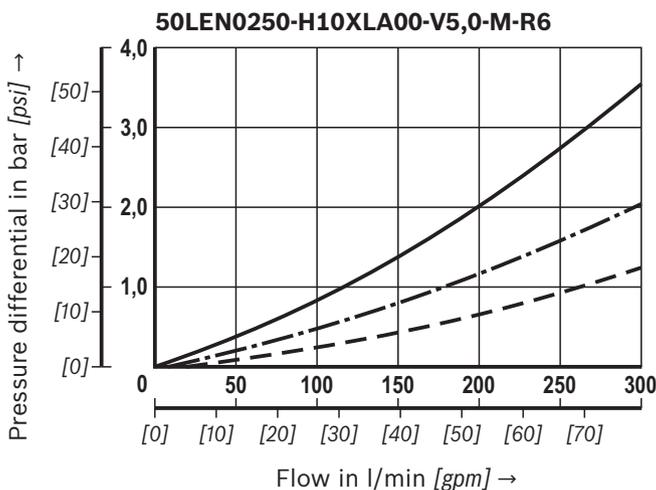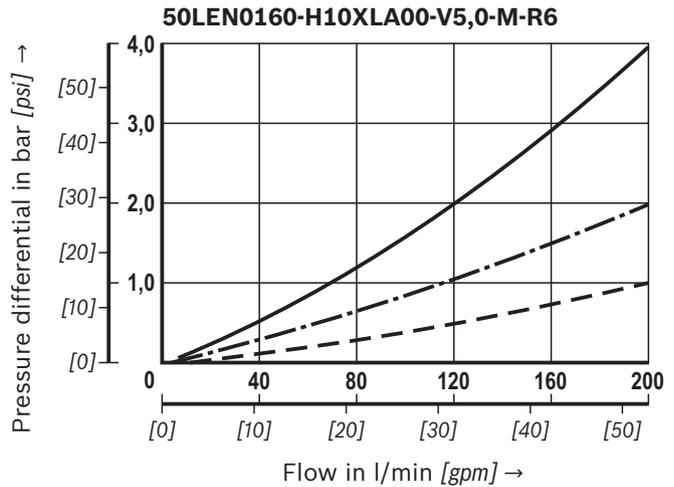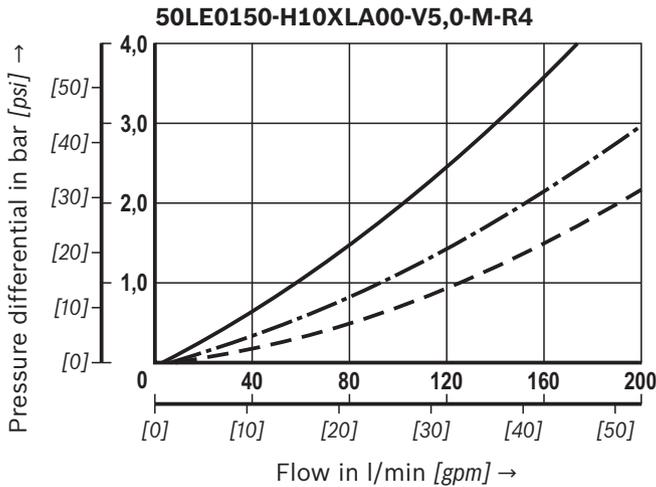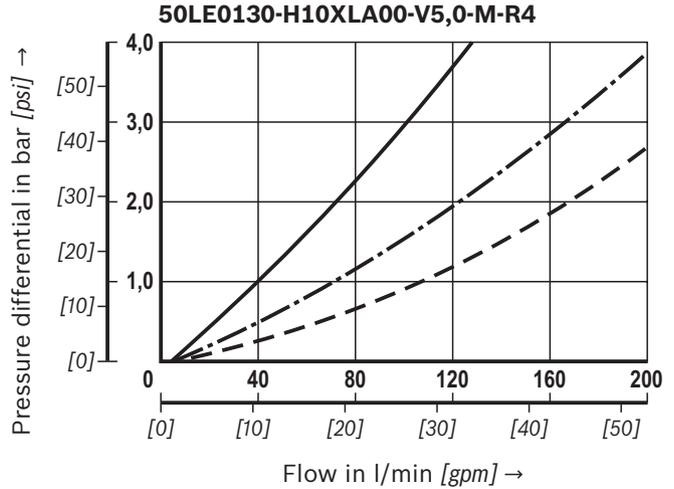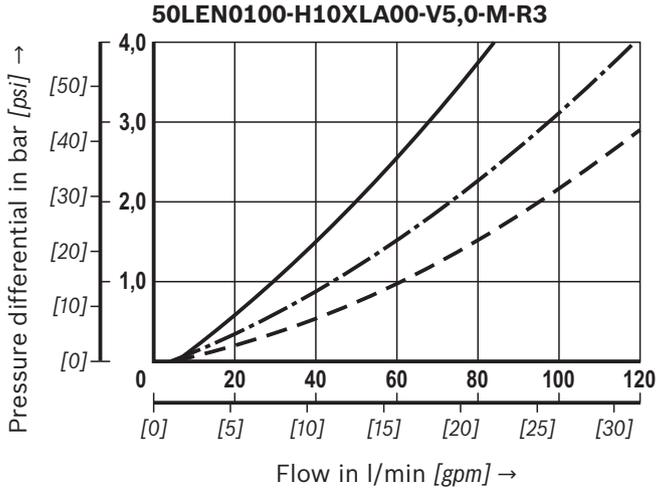

Dimensions: Size 0040 - size 0400


(dimensions in mm [inch])

Filter housing for filter elements according to DIN 24550 and according to Rexroth standard

| Type 50... | Content in l [US gal] | Weight in kg [lbs] | A1 | A2 | A3 | A4 |
|------------|-----------------------|--------------------|-------------|------------|-------------|-----------|
| LEN 0040 | 0.27 [0.07] | 1.05 [2.3] | 209 [8.22] | | 164 [6.46] | |
| LEN 0063 | 0.39 [0.1] | 1.1 [2.4] | 269 [10.59] | 87 [3.43] | 224 [8.82] | 24 [0.94] |
| LEN 0100 | 0.58 [0.15] | 1.2 [2.6] | 359 [14.13] | | 314 [12.36] | |
| LE 0130 | 0.89 [0.23] | 1.91 [4.2] | 299 [11.77] | 98 [3.86] | 251 [9.88] | 30 [1.18] |
| LE 0150 | 1.1 [0.29] | 2.06 [4.5] | 350 [13.78] | | 302 [11.89] | |
| LEN 0160 | 1.31 [0.35] | 3.1 [6.8] | 310 [12.20] | | 255 [10.04] | |
| LEN 0250 | 1.89 [0.50] | 3.3 [7.3] | 400 [15.75] | 122 [4.80] | 345 [13.58] | 35 [1.38] |
| LEN 0400 | 2.84 [0.75] | 3.8 [8.4] | 550 [21.65] | | 495 [19.49] | |


| Type 50... | A5 | A6 | B1 | B2 | B3 | B4 | ØB5 |
|------------|------------|------------|------------|-------------|-------------|-----------|------------|
| LEN 0040 | | | | | | | |
| LEN 0063 | 139 [5.47] | 80 [3.15] | 92 [3.62] | 27.5 [1.06] | 37.5 [1.48] | 10 [0.39] | 75 [2.95] |
| LEN 0100 | | | | | | | |
| LE 0130 | 150 [5.91] | 140 [5.51] | 122 [4.80] | 40 [1.57] | 50 [1.97] | 14 [0.55] | 105 [4.13] |
| LE 0150 | | | | | | | |
| LEN 0160 | 174 [6.85] | 140 [5.51] | 142 [5.59] | 50 [1.97] | 60 [2.36] | 20 [0.79] | 125 [4.92] |
| LEN 0250 | | | | | | | |
| LEN 0400 | | | | | | | |

| Type 50... | ØB6 | B7 | B8 | C1 connection | ØC2 | ØC3 | SW |
|------------|------------|-----------|-----------|------------------------------|------------------------|-----------|-----------|
| LEN 0040 | | | | | | | |
| LEN 0063 | 58 [2.28] | 20 [0.79] | 41 [1.61] | G 3/4 1 1/16-12 UN-2B | 33 [1.30] 41 [1.61] | | |
| LEN 0100 | | | | | | | |
| LE 0130 | 82 [3.23] | 20 [0.79] | 56 [2.20] | G 1 1 5/16-12 UN-2B | 41 [1.61] 49 [1.93] | 32 [1.26] | 17 [0.67] |
| LE 0150 | | | | | | | |
| LEN 0160 | 102 [4.02] | 30 [1.18] | 66 [2.60] | G 1 1/2 1 7/8-12 UN-2B | 56 [2.20] 65 [2.56] | | |
| LEN 0250 | | | | | | | |
| LEN 0400 | | | | | | | |

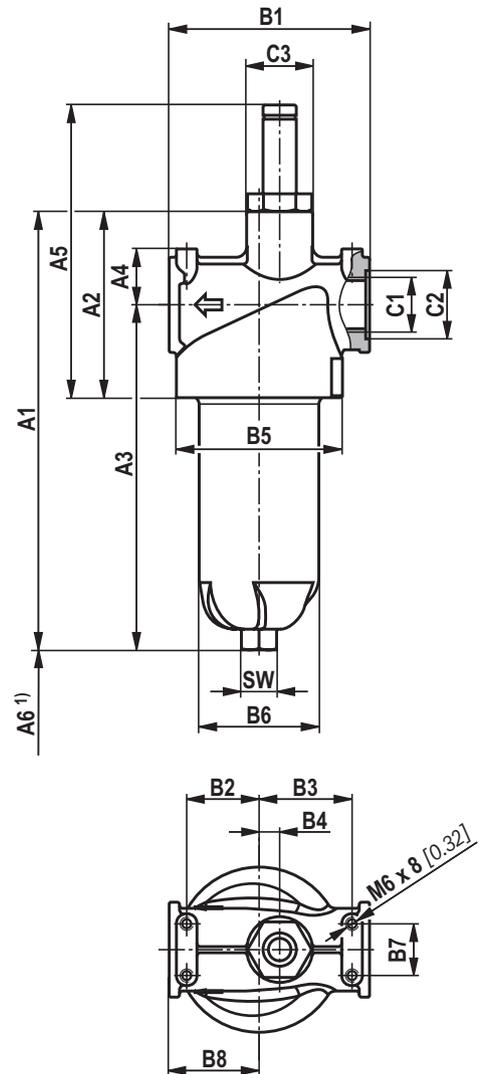
50 LEN 0040-0400

¹⁾ Servicing height for filter element exchange

Maintenance indicator (dimensions in mm [inch])

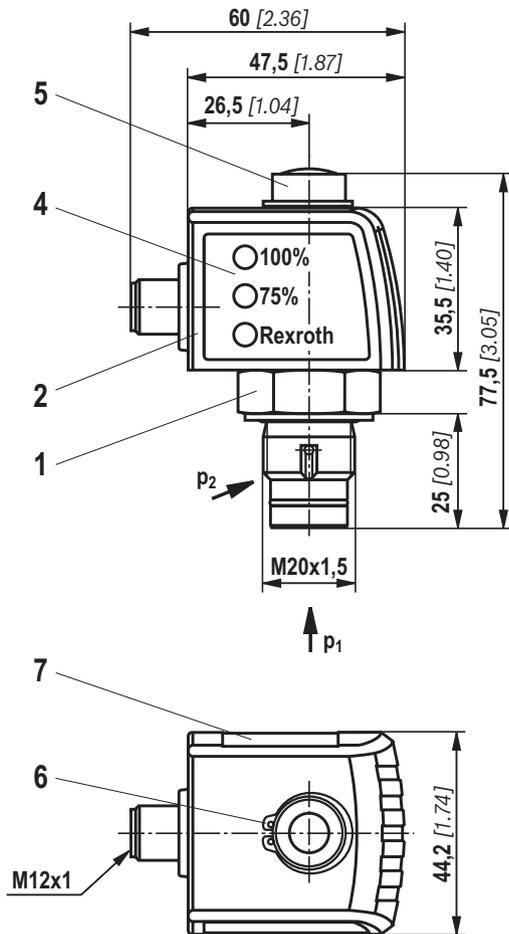Pressure differential indicator with mounted switching element M12 x 1

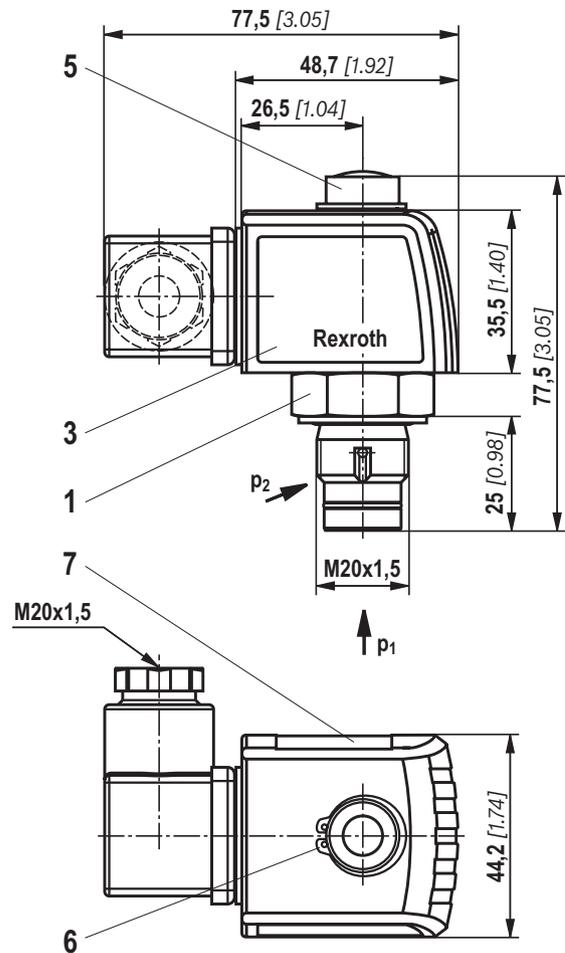

Pressure differential indicator with mounted switching element EN-175301-803



- 1 Mechanical optical maintenance indicator; max. tightening torque $M_{A \max} = 50 \text{ Nm}$ [36.88 lb-ft]
- 2 Switching element with locking ring for electrical maintenance indicator (rotatable by 360°); round plug-in connection M12 x 1, 4-pole
- 3 Switching element with locking ring for electrical maintenance indicator (rotatable by 360°); rectangular plug-in connection EN175301-803
- 4 Housing with three LEDs: 24 V =
green: Stand-by
yellow: Switching point 75%
red: Switching point 100%
- 5 Visual indicator bistable
- 6 Locking ring DIN 471-16 x 1, **material no. R900003923**
- 7 Name plate

Notices:

Representation contains mechanical optical maintenance indicator (1) and electronic switching element (2) (3). Switching elements with increased switching power upon request.

Ordering code spare parts

Filter element

| | | | | | |
|----|----|----|----|----|----|
| 01 | 02 | 03 | 04 | 05 | 06 |
| 2. | | | - | - | 0 |

Filter element

| | | |
|----|--------|----|
| 01 | Design | 2. |
|----|--------|----|

Nominal size

| | | |
|----|--|--|
| 02 | LEN... (Filter element according to DIN 24550) | 0040 0063 0100 0160 0250 0400 |
| | LE... (Filter elements according to Bosch Rexroth standard) | 0130 0150 |

Filter rating in µm

| | | | |
|----|---|--|----------------------------------|
| 03 | Nominal | Stainless steel wire mesh, cleanable | G10 G25 G40 G60 G100 |
| | Nominal | Filter paper, not cleanable | P10 P25 |
| | Absolute (ISO 16889); $\beta_{x(c)} \geq 200$ | Non-woven glass fiber media, not cleanable | H3XL H6XL H10XL H20XL |

Pressure differential

| | | |
|----|--|-----|
| 04 | max. admissible pressure differential of the filter element 30 bar [435 psi] | A00 |
| | max. admissible pressure differential of the filter element 330 bar [4786 psi] | B00 |

Bypass valve

| | | |
|----|------------------------------|---|
| 05 | Always 0 with filter element | 0 |
|----|------------------------------|---|

Seal

| | | |
|----|----------|---|
| 06 | NBR seal | M |
| | FKM seal | V |

Order example:

2.0100 H3XL-A00-0-M

For detailed information on Rexroth filter elements please refer to data sheet 51420.

Preferred program replacement filter element

| Replacement filter element 3 micron | | Replacement filter element 6 micron | | Replacement filter element 10 micron | |
|-------------------------------------|---------------------|-------------------------------------|---------------------|--------------------------------------|----------------------|
| R928006645 | 2.0040 H3XL-A00-0-M | R928006646 | 2.0040 H6XL-A00-0-M | R928006647 | 2.0040 H10XL-A00-0-M |
| R928006699 | 2.0063 H3XL-A00-0-M | R928006700 | 2.0063 H6XL-A00-0-M | R928006701 | 2.0063 H10XL-A00-0-M |
| R928006753 | 2.0100 H3XL-A00-0-M | R928006754 | 2.0100 H6XL-A00-0-M | R928006755 | 2.0100 H10XL-A00-0-M |
| R928022274 | 2.0130 H3XL-A00-0-M | R928022275 | 2.0130 H6XL-A00-0-M | R928022276 | 2.0130 H10XL-A00-0-M |
| R928022283 | 2.0150 H3XL-A00-0-M | R928022284 | 2.0150 H6XL-A00-0-M | R928022285 | 2.0150 H10XL-A00-0-M |
| R928006807 | 2.0160 H3XL-A00-0-M | R928006808 | 2.0160 H6XL-A00-0-M | R928006809 | 2.0160 H10XL-A00-0-M |
| R928006861 | 2.0250 H3XL-A00-0-M | R928006862 | 2.0250 H6XL-A00-0-M | R928006863 | 2.0250 H10XL-A00-0-M |
| R928006915 | 2.0400 H3XL-A00-0-M | R928006916 | 2.0400 H6XL-A00-0-M | R928006917 | 2.0400 H10XL-A00-0-M |

Ordering code spare parts

Mechanical optical maintenance indicator

| | | | | | |
|----|----|----|-----|----|----|
| 01 | 02 | 03 | 04 | 05 | 06 |
| W | O | - | D01 | - | - |

| | | |
|----|-----------------------|---|
| 01 | Maintenance indicator | W |
|----|-----------------------|---|

| | | |
|----|------------------------------|---|
| 02 | Mechanical optical indicator | O |
|----|------------------------------|---|

Design

| | | |
|----|----------------------------------|-----|
| 03 | Pressure differential, design 01 | D01 |
|----|----------------------------------|-----|

Switching pressure

| | | |
|----|--------------------|-----|
| 04 | 0.8 bar [12 psi] | 0,8 |
| | 1.5 bar [22 psi] | 1,5 |
| | 2.2 bar [32 psi] | 2,2 |
| | 5.0 bar [72.5 psi] | 5,0 |

Seal

| | | |
|----|----------|---|
| 05 | NBR seal | M |
| | FKM seal | V |

max. nominal pressure

| | | |
|----|---|-----|
| 06 | Switching pressure 0.8 bar [11.6 psi], 160 bar [2321 psi] | 160 |
| | Switching pressure 1.5 bar [21.8 psi], 160 bar [2321 psi] | 160 |
| | Switching pressure 2.2 bar [31.9 psi], 160 bar [2321 psi] | 160 |
| | Switching pressure 5.0 bar [72.5 psi], 450 bar [6527 psi] | 450 |

Mechanical optical maintenance indicator

| Material no. | Description |
|--------------|------------------|
| R928038779 | WO-D01-0.8-M-160 |
| R928038778 | WO-D01-0.8-V-160 |
| R928038781 | WO-D01-1.5-M-160 |
| R928038780 | WO-D01-1.5-V-160 |
| R901025312 | WO-D01-2.2-M-160 |
| R901066233 | WO-D01-2.2-V-160 |
| R901025313 | WO-D01-5,0-M-450 |
| R901066235 | WO-D01-5,0-V-450 |

Ordering code spare parts

Seal kit

| | | | |
|----------|-----------------|----|----|
| 01 | 02 | 03 | 04 |
| D | 50/110LE | | - |

| | | |
|----|-----------------------|-----------------|
| 01 | Seal kit | D |
| 02 | Series 50LE and 110LE | 50/110LE |

Nominal size

| | | |
|----|-----------|-------------------|
| 03 | 0040-0100 | N0040-0100 |
| | 0130-0150 | 0130-0150 |
| | 0160-0400 | N0160-0400 |

Seal

| | | |
|----|----------|----------|
| 04 | NBR seal | M |
| | FKM seal | V |

Seal kit

| Material no. | Description |
|-------------------|-----------------------|
| R928046935 | D50/110LEN0040-0100-M |
| R928046936 | D50/110LE0130-0150-M |
| R928046937 | D50/110LEN0160-0400-M |
| R928051951 | D50/110LEN0040-0100-V |
| R928051952 | D50/110LE0130-0150-V |
| R928051953 | D50/110LEN0160-0400-V |

Assembly, commissioning, maintenance

Installation

The max. operating pressure of the system must not exceed the max. admissible operating pressure of the filter (see type plate).

During assembly of the filter (see also chapter “Tightening torque”), the flow direction (direction arrows) and the required servicing height of the filter element (see chapter “Dimensions”) are to be considered.

Easy filter element exchange is guaranteed in the installation position filter bowl vertically downwards. The maintenance indicator must be arranged in a well visible way.

Remove the plastic plugs in the filter inlet and outlet.

Ensure that the system is assembled without tension stress.

The optional electronic maintenance indicator is connected via the electronic switching element with 1 or 2 switching points, which is attached to the mechanical optical maintenance indicator and held by means of the locking ring.

Commissioning

Commission the system.

Notice:

There is no bleeding provided at the filter.

Maintenance

- ▶ If at operating temperature, the red indicator pin reaches out of the mechanical optical maintenance indicator and/or if the switching process in the electronic switching element is triggered, the filter element is contaminated and needs to be replaced and cleaned respectively.

- ▶ The material number of the corresponding replacement filter element is indicated on the name plate of the complete filter. It must comply with the material number on the filter element.
- ▶ Decommission the system.
- ▶ The operating pressure is to be built up on the system side.

Notice:

There is no bleeding provided at the filter.

- ▶ Via the drain screw (from size 0160 fitted by default), the oil on the dirt side can be drained.
- ▶ Screw off the filter bowl.
- ▶ Remove the filter element from the spigot by rotating it slightly.
- ▶ Clean the filter components, if necessary.
- ▶ Check the seals at the filter bowl for damage and renew them, if necessary.
For suitable seal kits refer to chapter “Spare parts”.
- ▶ Filter elements made of wire mesh can be cleaned. The efficiency of the cleaning process depends on the type of dirt and the amount of the pressure differential before the filter element exchange.
If the pressure differential after the filter element exchange exceeds 150% of the value of a brand-new filter element, the filter element made of wire mesh (G...) also needs to be replaced. For detailed cleaning instructions refer to data sheet 51420.
- ▶ Install the new or cleaned filter element on the spigot again by slightly rotating it.
- ▶ The filter is to be assembled in reverse order.
- ▶ The torque specifications (“Tightening torques” chapter) are to be observed.
- ▶ Commission the system.

WARNINGS!

- ▶ Assembly and disassembly only with depressurized system!
- ▶ Tank is under pressure!
- ▶ Maintenance only be specialists.
- ▶ Remove the filter bowl only if it is not under pressure!
- ▶ Do not exchange the maintenance indicator while the filter is under pressure!

- ▶ Functional and safety warranty only applicable when using genuine Bosch Rexroth spare parts!
- ▶ Warranty becomes void if the delivered item is changed by the ordering party or third parties or improperly mounted, installed, maintained, repaired, used or exposed to environmental condition that do not comply with the installation conditions.

Tightening torques

(dimensions in mm [inch])

Mounting

| Series 50 ... | LEN0040 | LEN0063 | LEN0100 | LE0130 | LE0150 | LEN0160 | LEN02 | LEN0400 |
|--|----------------------|---------|---------|--------|--------|---------|-------|---------|
| Screw/tightening torque with $\mu_{\text{total}} = 0.14$ | M6/4.5 Nm \pm 10 % | | | | | | | |
| Quantity | 4 | | | | | | | |
| Recommended property class of screw | 8.8 | | | | | | | |
| Minimum screw-in depth | 6 mm + 1 mm | | | | | | | |

Filter bowl and maintenance indicator

| Series 50 ... | LEN0040 | LEN0063 | LEN0100 | LE0130 | LE0150 | LEN0160 | LEN02 | LEN0400 |
|---|---------------|---------|---------|--------|--------|---------|-------|---------|
| Tightening torque filter bowl | 50 Nm + 10 Nm | | | | | | | |
| Tightening torque maintenance indicator | 50 Nm | | | | | | | |
| Tightening torque cubic connector screw switching element EN-175301-803 | M3/0.5 Nm | | | | | | | |

Directives and standardization

Classification according to the Pressure Equipment

Directive

The inline filters for hydraulic applications according to 51447 are pressure holding equipment according to article 1, section 2.1.4 of the Pressure Equipment Directive 97/23/EC (PED).

However, on the basis of the exception in article 1, section 3.6 of the PEG, hydraulic filters are exempt from the PED if they are not classified higher than category I (guideline 1/19). They do not receive a CE mark.

Use in potentially explosive areas according to directive 94/9/EC (ATEX)

The inline filters according to 51447 are no equipment or components in the sense of directive 94/9/EC and are not provided with a CE mark. It has been proven with the ignition risk analysis that these inline filters do not have own ignition sources acc. to DIN EN 13463-1:2009.

According to DIN EN 60079-11:2012, the electronic maintenance indicators WE-1SP-M12x1 and WE-1SP-EN175301-803 are simple, electronic operating equipment not having an own voltage source. This simple, electronic operating equipment may - according to DIN

EN 60079-14:2008 - in intrinsically safe electric circuits (Ex ib) be used in systems without marking and certification.

The inline filters and the electronic maintenance indicators described here can be used for the following potentially explosive areas:


| | zone suitability | |
|------|------------------|----|
| Gas | 1 | 2 |
| Dust | 21 | 22 |

Directives and standardization

| Complete filter with mech./opt. Maintenance indicator | | | | |
|---|------|-----|-------------------|-------------------|
| Use /assignment | | | Gas 2G | Dust 2D |
| Assignment | | | Ex II 2G c IIC TX | Ex II 2D c IIC TX |
| Conductivity of the medium | pS/m | min | 300 | |
| Dust accumulation | | max | – | 0.5 mm |

| Electronic switching element in the intrinsically safe electric circuit | | | | |
|---|----|-----|---|--------------------------------|
| Use /assignment | | | Gas 2G | Dust 2D |
| Assignment | | | Ex II 2G Ex ib IIB T4 Gb | Ex II 2D Ex ib IIIC T100 °C Db |
| Perm. intrinsically safe electric circuits | | | Ex ib IIC, Ex ic IIC | Ex ib IIIC |
| Technical data | | | Values only for intrinsically safe electric circuit | |
| Switching voltage | Ui | max | 150 V AC/DC | |
| Switching current | Ii | max | 1.0 A | |
| Switching power | Pi | max | 1.3 W T4 T _{max} 40 °C | 750 mW T _{max} 40 °C |
| | | max | 1.0 W T4 T _{max} 80 °C | 550 mW T _{max} 100 °C |
| Surface temperature ¹⁾ | | max | – | 100 °C |
| Inner capacity | Ci | | negligible | |
| Inner inductivity | Li | | negligible | |
| Dust accumulation | | max | – | 0.5 mm |

Possible circuit according to DIN EN 60079-14

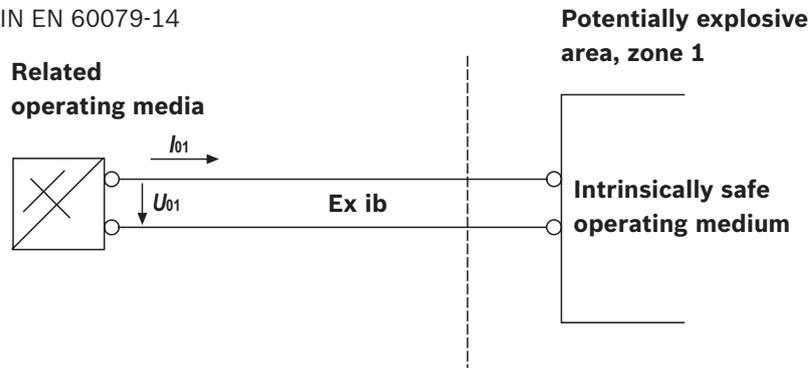

⚠ WARNING!

- ▶ Explosion hazard due to high temperature! The temperature depends on the temperature of the medium in the hydraulic circuit and must not exceed the value specified here. Measures are to be taken so that in the potentially explosive area, the max. admissible ignition temperature is not exceeded.
- ▶ When using the inline filters in accordance with 51447 in potentially explosive areas, appropriate equipotential bonding has to be ensured. The filter is preferably to be earthed via the mounting screws. It has to be

noted in this connection that paintings and oxidic protective layers are not electrically conductive.

- ▶ Maintenance only by specialists, instruction by the machine end-user acc. to DIRECTIVE 1999/92/EC appendix II, section 1.1
- ▶ During filter element exchanges, the packaging material is to be removed from the replacement element outside the potentially explosive area
- ▶ Functional and safety warranty only applicable when using genuine Rexroth spare parts

Bosch Rexroth AG
Werk Ketsch
Hardtwaldstr. 43
68775 Ketsch, Germany
Telefon +49 (0) 62 02 / 603-0
filter-support@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without the consent of Bosch Rexroth AG. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.